



Where Special Comes As Standard

# YT203EV

ELECTRIC TERMINAL TRACTOR  
Built to Last - 310 kWh On-board Power

Durable, operator friendly vehicle built to work in the toughest environments.



CLEAN PORTS  
**GRANTE****ELIGIBLE**

(888) 973-3421  
[www.terbergtaylor.com](http://www.terbergtaylor.com)





# Built to Last Charged to Perform

## YT203EV ELECTRIC TERMINAL TRACTOR

### 310 kWh On-Board Power

#### YT203EV: FEATURES & BENEFITS

##### OPERATOR FIRST:

1. Modern Spacious Fully Steel Cabin
2. Elite Ride Quality
3. Tight Steer Angles
4. Customizable Railings
5. Ingress & Egress Options
6. Ergonomic Fingertip Controls
7. Informative and Highly Intuitive Dash
8. Air Conditioning
9. Pneumatic Seat, Cup Holders & Coat Hook

##### STRONGEST IN THE INDUSTRY:





10. 1-3/16" Fully Galvanized Frame
11. Fully Cased Component Protection
12. Toughest Lifting Boom in the Industry Paired with 79,800-lb Cylinders
13. Proven Axles:
  - Front: 24,000 lbs @12 mph
  - Rear: 84,000 lbs @12 mph
14. Steel Hydraulic Tanks
15. Industrial Three-piece Bumper
16. Premium ZF CeTrax Traction Motor 200kW Peak Output
17. Fully Compatible CCS1 Charging @ 150kW up to 180kW
18. 310 kWh of On-board Power Suitable for operation in -22°F up to +122°F (-30deg C up to +50deg C)
19. Comprehensive Regenerative Braking
20. Thermal Management System
21. BESS Charging System Compatible

##### TECHNOLOGY:

22. Terberg OEM 2.0 Control System
23. User Friendly Diagnostics
24. Included **TERBERGCONNECT®** with a 5-year Complimentary Subscription (See side panel for more information)

##### MAINTENANCE:

25. 4-day Classroom & Hands-on Training Available
26. Dealer Supported with Local Brick & Mortar Locations
27. In-territory Parts Availability
28. OEM On-call Support Available
29. Online Parts: Premium Technical Support
30. Real-time, Bi-lingual Diagnostics Assistance

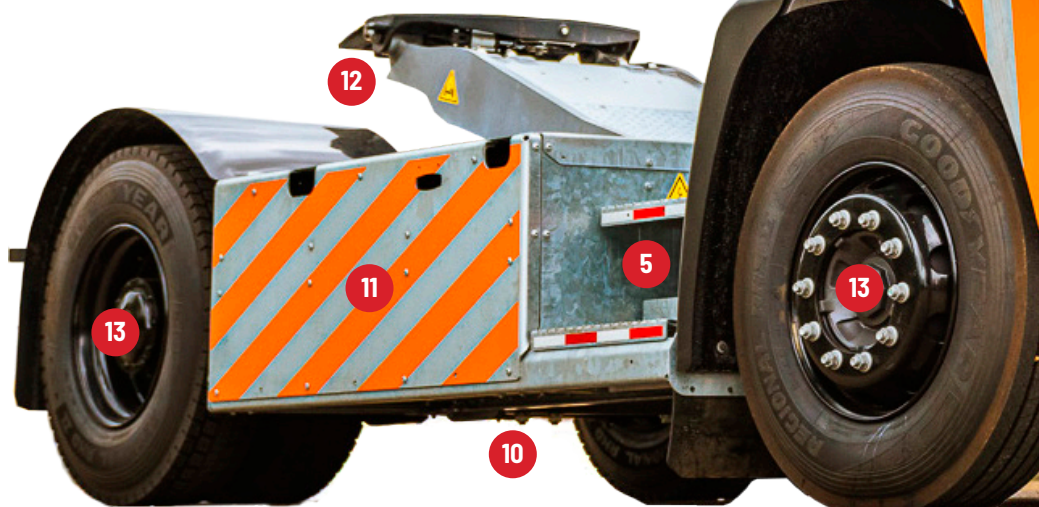

#### YT203EV: BASIC SPECIFICATIONS

Type:	Electric Terminal Tractors
GCW:	158,000-256,000 lbs.*
Driveline:	4 x 2
Traction Motor:	ZF CeTrax


Brakes:	Regenerative
Operating Temp Range:	-22°F up to +122°F
Front Axle Capacity:	24,000 lbs @12 mph



## OPTIMIZE FLEET MANAGEMENT & UPTIME

By including Terberg Connect tractor telematics in your tractor solution you can use valuable data to optimize your shunting/yard operations:

- Schedule proactive maintenance based on the number of running hours
- Incoming fault codes enable service engineers to quickly diagnose
- Enable efficient remote support and/or on-site cost-effective 'first time right' repair
- Monitor idle time per tractor and use the data to improve efficiency
- Monitor the energy consumption and battery state-of-charge to determine ideal charge cycles

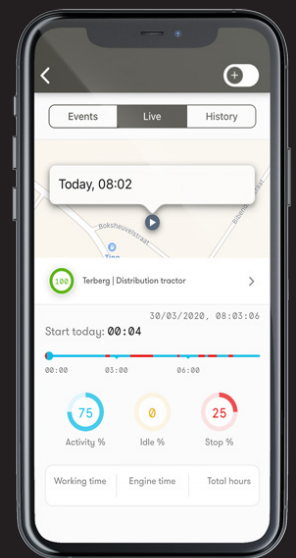

Rear Axle Capacity:  
5th Wheel:  
5th Wheel Lift Capacity:

84,000 lbs @12 mph  
Terberg cast steel plate 2 in  
80,000 lbs \*\*

\* Depending on axle ratio and operating conditions  
\*\* Depending on how equipped and operating conditions







**(888) 973-3421**  
[www.terbergtaylor.com](http://www.terbergtaylor.com)

Scan or Click

